

habitat WIN



Personalize your environment
and enjoy a great comfort

C³SystemS[®]
the open view company



Habitat Win is a height adjustable glass windscreen that allow you to enjoy outdoor spaces with friends and family from the beginning of the spring until late autumn. Habitat Win offers the possibility of having an open terrace when the weather is nice and sunny, and at the same time it offers protection against the wind by lifting an adjustable glass panel for continuing enjoying outdoor spaces.

Glass adjustable windscreen Habitat Win is designed to be flexible and easily used, as the upper panel can be manually moved, making it a perfect solution for restaurant terraces. Customers can also adjust the height of the windscreen depending on if they want an intimate setting or to enjoy the outdoor environment.



Product
Approved & Certified



Made from aluminum, standard model is equipped with a 3+3 mm safety laminated glass or 6 mm tempered glass, on both lower fixed panel and adjustable upper panel. There are a variety of different supports and union kits available, made of stainless steel, depending on the configuration of the system.



SUPPORTS



SIMPLE REINFORCED SUPPORT:
Height adjustable floor fastening support.



DOUBLE REINFORCED SUPPORT:
Height adjustable floor fastening support for connecting modules.



SHORT BASE SUPPORT:
Short height adjustable floor fastening support.




SHORT DOUBLE REINFORCED SUPPORT:
Double Short height adjustable floor fastening support for connecting modules.



FOREHEAD SUPPORT:
Front height adjustable support.



DOUBLE FOREHEAD SUPPORT:
Front height adjustable support.

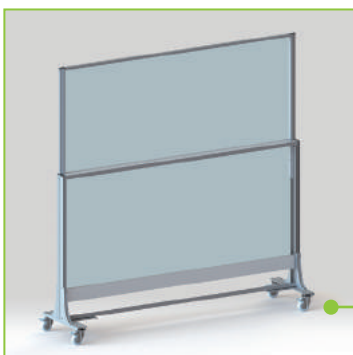


FBEARING SUPPORT:
Height adjustable bearing support with brakes on each wheel for places where fastening is not possible.



CONNECTIONS AND LOCKS



LINEAR CONNECTION:
External connection plate for straight line module connection

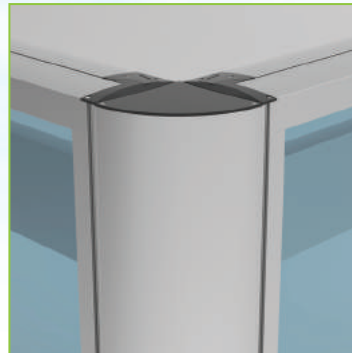

DECORATIVE PROFILE:
decorative profile for 90° angle.



WALL CONNECTION:
screen to wall connection plate.



LOCK:
locking system that allow you the adjustable panel at the desired height.

TECHNICAL SPECIFICATIONS

WIDTH	Maximum 2000 mm per module	
HEIGHT	4 standard measures A (closed / lower section) B (opened / upper section)	
	<ul style="list-style-type: none"> • 950/1600 (42 Kg/ml) • 1150-2000 (52 Kg/ml) 	<ul style="list-style-type: none"> • 1350-2200 (56 Kg/ml) • 1550-2400 (60 Kg/ml)
THICKNESS	90 mm	
GLASS	3 + 3mm laminated glass or 6mm tempered glass in the lower and upper section. Glass can be personalized with extra clear glass, matt finished glass or other types of glasses.	
FINISHES	Standard finishes: 9006 nature gray and white. Available in all RAL and anodized colors.	
INSTALLATION	Different supports, connectors and 90° angle options available. All the accesories are made of stainless steel.	
OPTIONS	Panel stoppage at any height. Key Lock for lowered / raised position. Ask for more possibilities.	

NEW COMPLEMENT FOR HEIGHT ADJUSTABLE GLASS WINDSCREEN




Refurbish you terrace with a new pot support for your windscreen.



Option windscreen + fixed pot support





Option windscreen + bearing pot support



NEW ADJUSTABLE GLASS WINDSCREEN SYSTEM



New measure for height adjustable glass windscreen 1550 / 2400 mm, perfect for covering open spaces such as pergolas, restaurants and similar open spaces

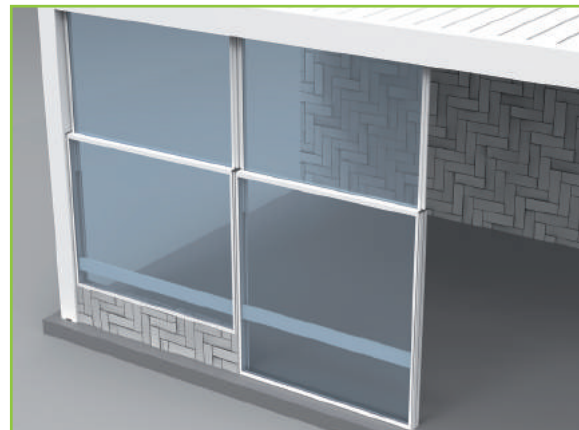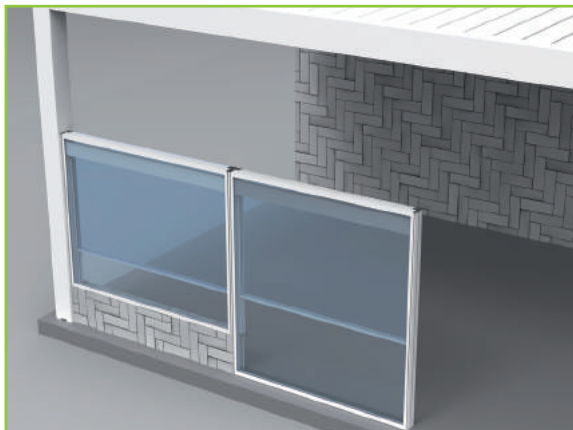

TESTS AND CERTIFICATES

Height adjustable glass windscreen Habitat Win is fully manufactured in SPAIN. All the components are designed and manufactured by C3 Systems S.L. This product has been tested for wind resistance watertightness according to the regulations required.



Habitat Win product has a CE mark, as we endorse the production properly sealed and signed.



Windscreen Habitat Win fulfills international requirements for aluminum powder coating Qualanod, Qualideco and Qualicoat.

Documento N° 240946 Hoja 1 de 1

RESISTENCIA A LAS CARGAS DE VIENTO.

Empresa	C3 SYSTEM, S.L. c/ Juan De Herrera n° 34. Elche Parque Industrial. 03203- Elche, Alicante.	Norma de Ensayo UNE-EN 1922:2014. Cálculo estático y permanente. Resistencia a las cargas de viento. Método de ensayo y criterios de prestación. UNE-EN 14353:2004. Al 2000. Pruebas. Registros de prestaciones.
Producto	CORTAVIENTOS	Sección y/o fotografía: 
Modelo	AIR v2	
Fabricante	C3 SYSTEM, S.L.	
Dimensiones, (Ancho x Alto) mm.		
Posición plegado	2000 x 1905	
Posición desplegado	2000 x 1100	
Material	Aluminio L- 6063/ ISO AIMg0, 5Si	
Acristalamiento	Vidrio Float Templado de 6mm.	
Fecha de Ensayo	19.11.2015	

Resistencia a la carga de viento **CLASE 6**




Navarrete a 27 de Noviembre de 2015


Luis García Viguera
Responsable Técnico

El presente documento expresa y refleja los resultados asociados al informe de ensayo n° 240946 de fecha 19.11.2015. Para una adecuada identificación de las características del material ensayado y de los resultados obtenidos es imprescindible disponer de la documentación referida.


Documento N° 240043 Hoja 1 de 10

BARANDILLAS. ENSAYOS ESTÁTICOS, DINÁMICOS Y DE SEGURIDAD.

Empresa	C3 SYSTEM, S.L. c/ Juan De Herrera n° 34. Elche Parque Industrial. 03203- Elche, Alicante.	Norma de Ensayo UNE-EN 12510:2010. Barandillas. Método de ensayo. Parametros Adicionales de ensayo.
Producto	CORTAVIENTOS	Sección y/o fotografía: 
Modelo	AIR v2	
Dimensiones, (Ancho x Alto) mm.		
Posición plegado	2000 x 1905	
Posición desplegado	2000 x 1100	
Material	Aluminio L- 6063/ ISO AIMg0, 5Si	
Acristalamiento	Vidrio Float Templado de 6mm.	
Fecha de Ensayo	26.11.15	

Ensayo estático horizontal hacia el exterior	Cumple
Ensayo estático horizontal hacia el interior	Cumple
Ensayo estático vertical	Cumple
Ensayo dinámico de cuerpo blando de grandes dimensiones	Cumple
Ensayo dinámico de cuerpo duro	Cumple
Ensayo de seguridad	Cumple

Navarrete a 03 de Diciembre de 2015


Luis García Viguera
Responsable Departamento

El presente documento expresa y refleja los resultados asociados al informe de ensayo n° 240043 de fecha 26.11.15. Para una adecuada identificación de las características del material ensayado y de los resultados obtenidos es imprescindible disponer de la documentación referida.

APPLICATIONS



- 1 Height adjustable according to the need
- 2 Mobile system option, easily removed when needed
- 3 Wind and harsh weather conditions protection
- 4 Adjustable to customer's needs
- 5 Adaptable to any restaurants, coffee shops, terraces,....
- 6 Do not sacrifice views in order to protect yourself against harsh weather conditions



MADE IN SPAIN



C3 Systems, S.L. · Juan de Herrera, 34 · Elche Parque Industrial · 03203 Elche (Alicante) España · Telf. +34 966 286 186 · Fax: +34 965 682 677
c3systems@c3systems.es · www.c3systems.es · www.seeglass.es



The purpose of this document is to meet a commercial function. It does not constitute an authentic advertising offer in a "strict" sense. With a view to the training of the appropriate contract, please contact with C3SystemS, SL in order to offer you specific and personalized information that contains objective information regarding relevant characteristics which means that it will constitute an offer in a "strict" sense.

C3SystemS S.L. commits not to make misleading advertising by this means. To these effects, therefore, formal or numerical errors that could be found in the content of this document are not considered as misleading advertising, in particular regarding to the images accompanying in an illustrative way, and not contractual. In any case C3SystemS SL commits to correct it as soon as it becomes aware of such errors.